City of Longview

Downtown Streetscape Improvement Project

April 12, 2012

April
2012

Downtown
Streetscape
Improvement
Project

Attachment A

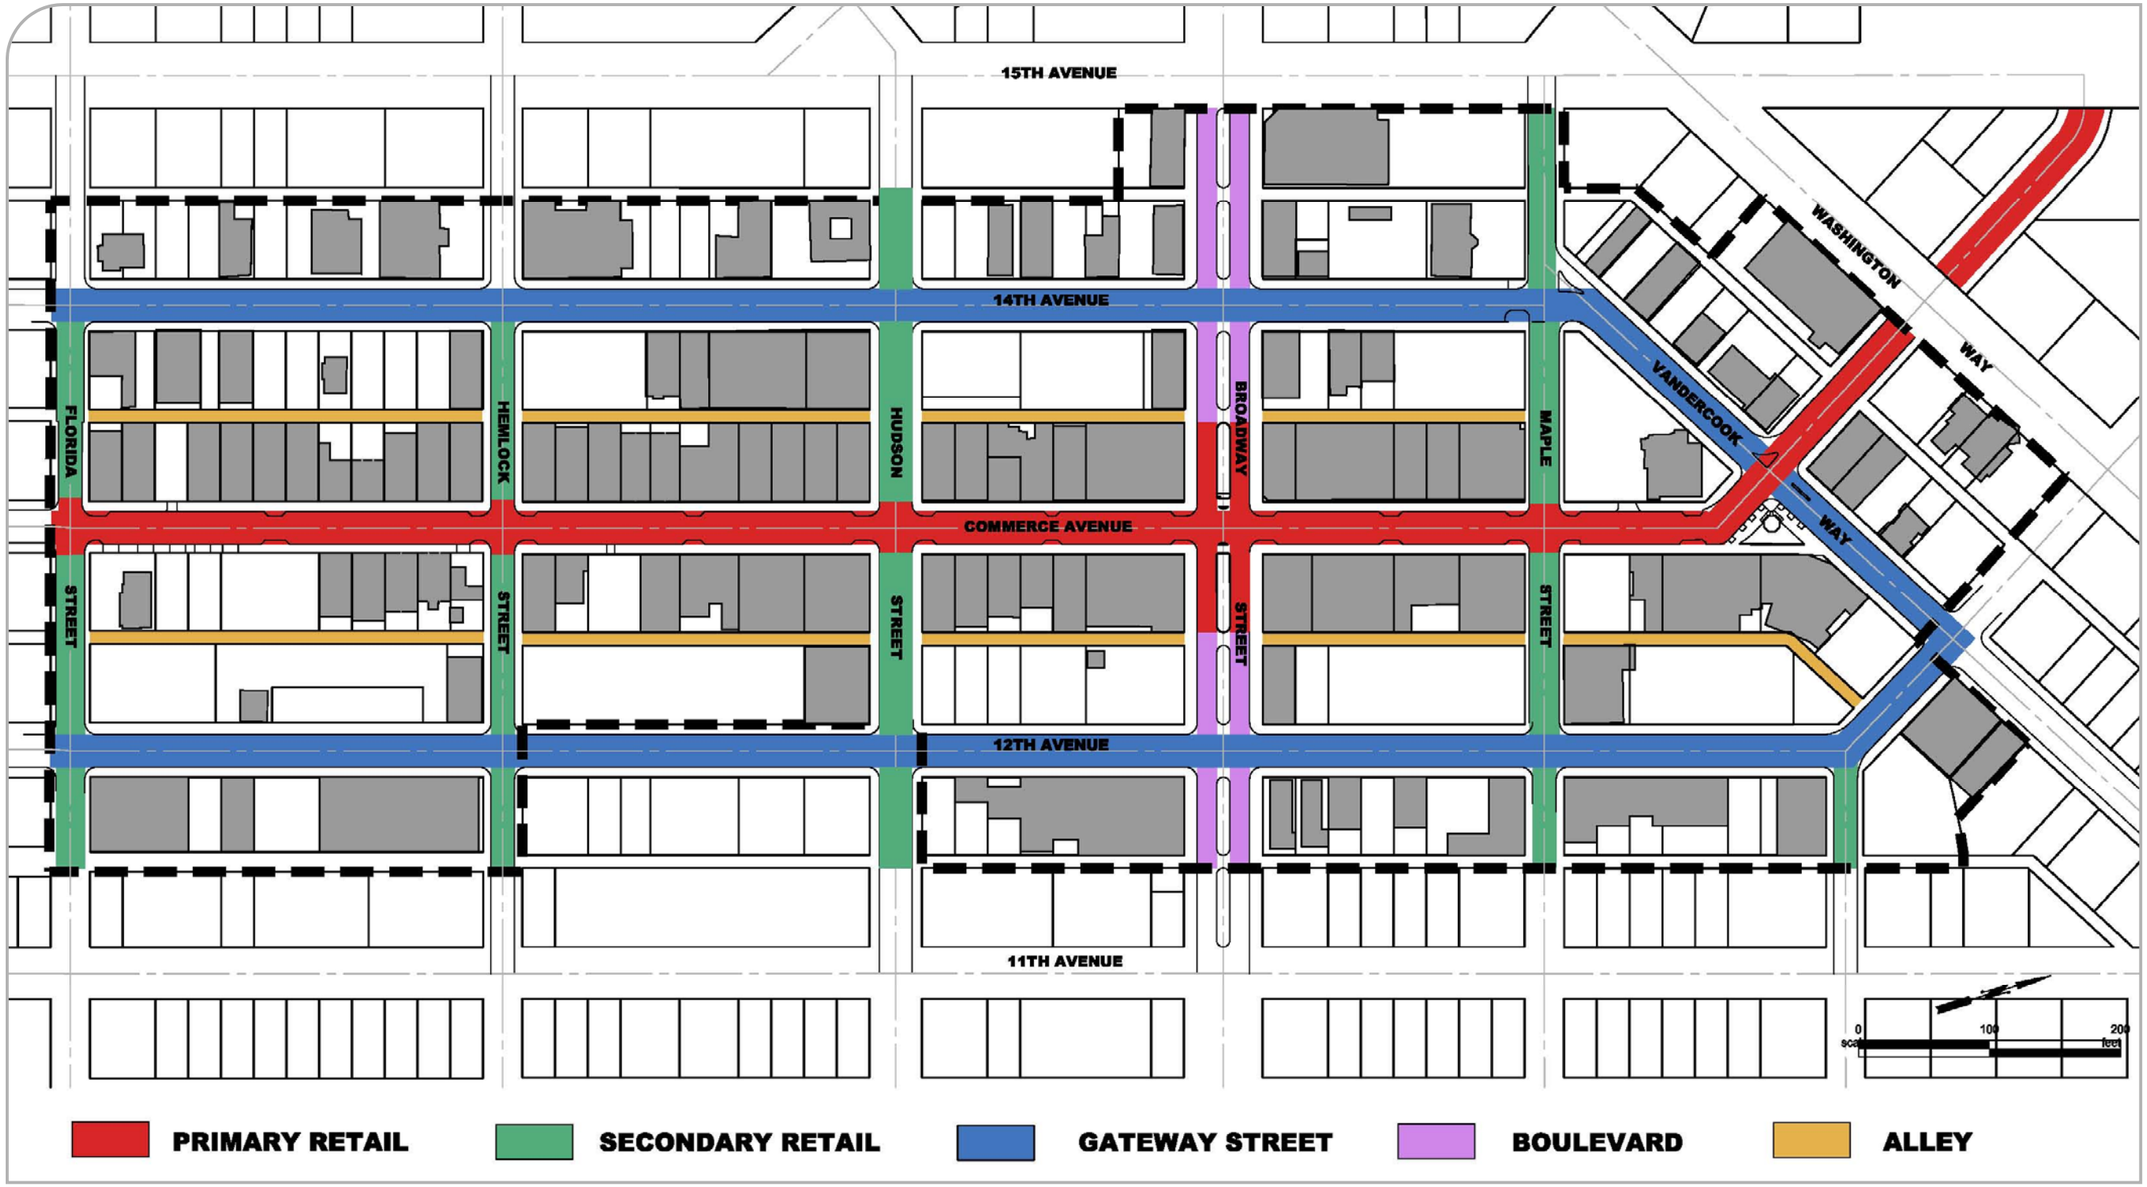

April
2012

Downtown
Streetscape
Improvement
Project

Downtown Streetscape Classification

Street Designation	*Sidewalk Treatment*	*Pedestrian Enhancements*	*Street Furnishings*	*Public Art*	*Lighting*	*Street Trees*
Primary Retail	-Concrete paving -Colored concrete paving -Permeable pavers	-Bulb-outs at intersections -Expanded mid-block plaza -Colored concrete at crosswalks and mid-block crossings	-Benches -Bike racks -Trash receptacles -Lighted bollards -Rain gardens	Yes	-Acorn street lights -Lighted bollards -String lights in trees	-Canopy trees at intersections and mid-blocks -Columnar trees along frontage -Tree grates
Secondary Retail	-Concrete paving -Colored concrete paving -Permeable pavers	-Bulb-outs at intersections -Colored concrete at crosswalks	-Benches -Bike racks -Trash receptacles		-Acorn street lights	-Columnar trees -Tree grates
Gateway Street	-Concrete Paving	-Bulb-outs at intersections -Striped crosswalks	-Benches -Bike racks -Trash receptacles		-Standard street lights	-Canopy trees -Mulch planters
Boulevard	-Concrete Paving	-Bulb-outs at intersections -Colored concrete at crosswalks	-Benches -Bike racks -Trash receptacles	Yes	-Acorn street lights -Standard street lights at median -Lighted bollards	-Canopy trees at intersections -Columnar trees along frontage -Flowering trees in median -Landscape parking strips and median
Alleys	-Colored or concrete paving	-Sidewalk system to connect public parking lots to streets and businesses -Pedestrian enhancements	-Wayfinding signs		-Pedestrian scale lighting (existing)	-Canopy trees (adjacent to public parking lots)

Street Classification Details